

Lana LED Square Trimless Downlight



L Lana Square Adjustable Trimless Downlight 1000 lumen 11w LED



Single, twin, triple and double square high performance downlights mounted in a trimless configuration which allows them to be installed without a surface trim ring.

A perforated metal plate is fixed to the ceiling with a downstanding metal lip to allow for a 3mm skim of plaster tight to the aperture.

The lamp is set high in a deep glare reducing baffle. The fittings are directionally adjustable through 360° horizontally and 50° vertically.

The fitting is supplied with the control gear for ease of installation. Firehood options are available.

● Black ○ White

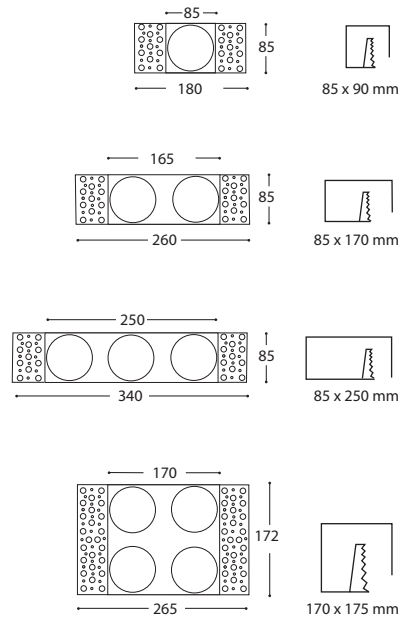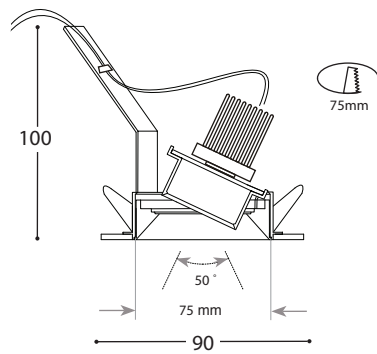

Emergency

For information on Flexible Emergency Lighting Remote Power Packs see page 7A4.

Transformers

For information on Altima's range of LED drivers and transformers please see page 1N.


Dimming

For information on Dimmer Packs see section 9.





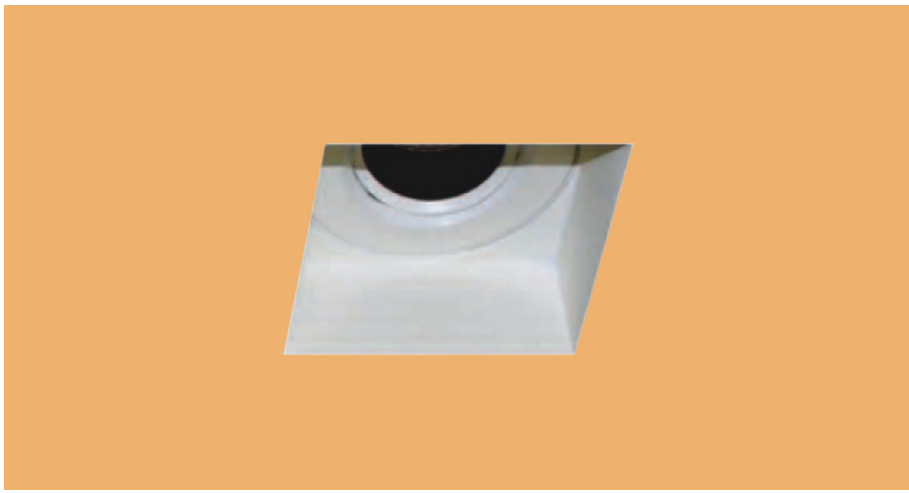

LED Technical Data

Material	Aluminium die-cast
Finish	● Black ○ White
Cutout	85x90 / 85x170 / 85x250 / 170x175mm
LED	High Output 11w 1000 lumen 3000 Kelvin
CRI	80
Approvals	







Dimming	1-10v Dimmable with 81.1015
	Wafer Button Multiway
	Wafer Rotary 1-10v
	DALI
	Trailing Edge






L LED Switch LED with Firehood

	12.4951L.57	12.4961L.57
	12.4952L.57	12.4962L.57
	12.4953L.57	12.4963L.57
	12.4954L.57	12.4964L.57
	12.4955L.57	12.4965L.57
	12.4956L.57	12.4966L.57






L Dimmable LED 1-10 Dimmable LED with Firehood

	12.4951LD.57	12.4961LD.57
	12.4952LD.57	12.4962LD.57
	12.4953LD.57	12.4963LD.57
	12.4954LD.57	12.4964LD.57
	12.4955LD.57	12.4965LD.57
	12.4956LD.57	12.4966LD.57

L Dimmable DALI

	12.4951LDD.57
	12.4952LDD.57
	12.4953LDD.57

Dimmable Trailing Edge

	12.4951LDE.57
	12.4952LDE.57
	12.4953LDE.57
	12.4954LDE.57
	12.4955LDE.57

Data

Material	Aluminium
Cutout	See Page 1A3
Lamp Wattage	11w 1000 lumen 3000 Kelvin
CRI	80
Protection	IP23
Approvals	