

CirKular Standard

4 x TLC 36w

A floor standing fitting providing soft local downlight with powerful uplighting and very high efficiency.

Four TLC 36 watt compact fluorescent lamps are used with high frequency flicker free electronic control gear. This combination gives very good energy efficiency and colour rendering quality.

A dimmable version is available and an emergency lighting option with a power supply to maintain 25% light output for three hours.

16.K210.57	4 x TLC 36w	White
------------	-------------	-------

Dimmable		
----------	--	--


16.K211.57	4 x TLC 36w	White
------------	-------------	-------

The dimmer is integrated within the fitting, so simply requires a push switch to operate or a wireless remote control. See our Wafer Switches range in section 9.


Emergency 3 hour Maintained		
-----------------------------	--	--

16.K212.57	4 x TLC 36w	White
------------	-------------	-------

All equipped with HF Ballast.



690

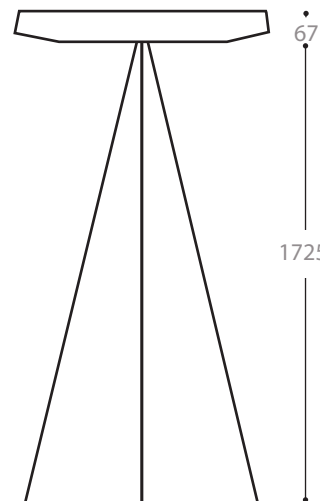

67

1725

#### Technical Data

Finish	_____	_____
Material	_____	_____
Lamp Wattage	_____	_____
Lamp	_____	_____
Control Gear	_____	_____

painted

Steel

4 x 36w

TLC 36w

high frequency/dimmable