


Lana Cone Round Trimless

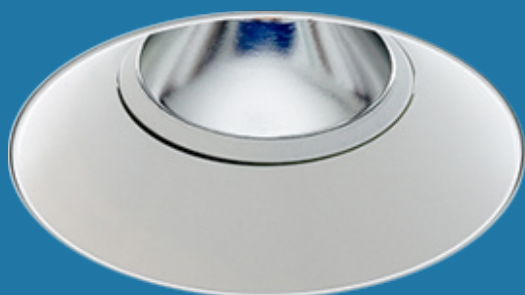

Single, twin and triple high performance downlight mounted in a trimless configuration which allows them to be installed without a surface trim ring.

The lamp is set high in a deep glare reducing baffle. The fittings are directionally adjustable through 360° horizontally and 50° vertically.


This fitting is prewired with standard high output LED 10 watt, 1000 lumen, 3000 kelvin, 2700 kelvin and 5600 kelvin are also available.



Dimming

1-10v
DALI
Trailing Edge



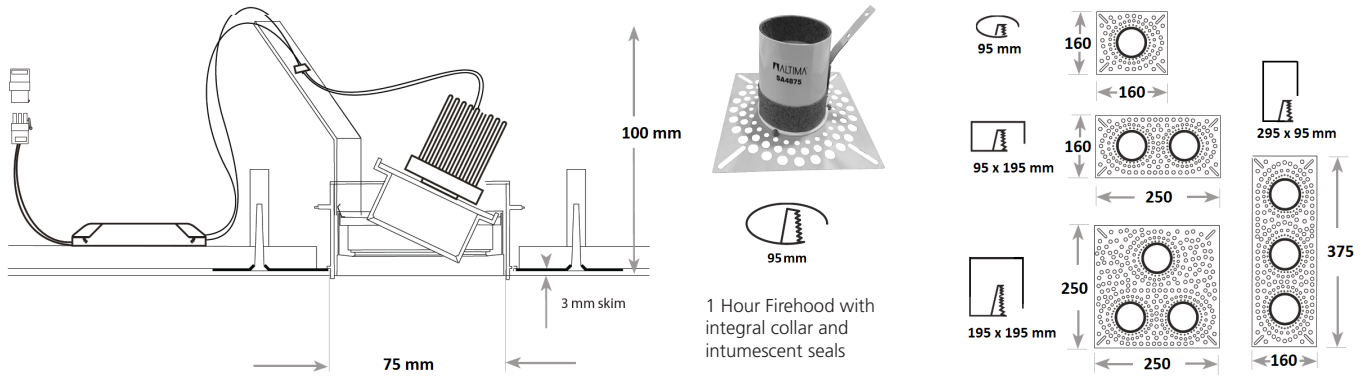

Land Cone Round Trimless - LED Downlight

10w 1000 lumen

Type	Switch	Dimmable 1-10v	Dimmable Dali	Dimmable Trailing Edge
Single	12.4051L.57	12.4051LD.57	12.4051LDD.57	12.4051LDT.57
Double	12.4052L.57	12.4052LD.57	12.4052LDD.57	12.4052LDT.57
Triple	12.4053L.57	12.4053LD.57	12.4053LDD.57	12.4053LDT.57
Triangle	12.4073L.57	12.4073LD.57	12.4073LDD.57	12.4073LDT.57

With Firehood - 1 Hour Firehood with integral collar and intumescent seals


Type	Switch	Dimmable 1-10v	Dimmable Dali	Dimmable Trailing Edge
Single	12.4061L.57	12.4061LD.57	12.4061LDD.57	12.4061LDT.57
Double	12.4062L.57	12.4062LD.57	12.4062LDD.57	12.4062LDT.57
Triple	12.4063L.57	12.4063LD.57	12.4063LDD.57	12.4063LDT.57
Triangle	12.4083L.57	12.4083LD.57	12.4083LDD.57	12.4083LDT.57

Emergency

Type		With Firehood
Emergency Standard	12.4051EM.57	12.4061EM.57
Emergency Auto Test	12.4051EM2.57	12.4061EM2.57


.18 Satin Silver
 .50 Black
 .57 White

Light Distribution for Lana Cone

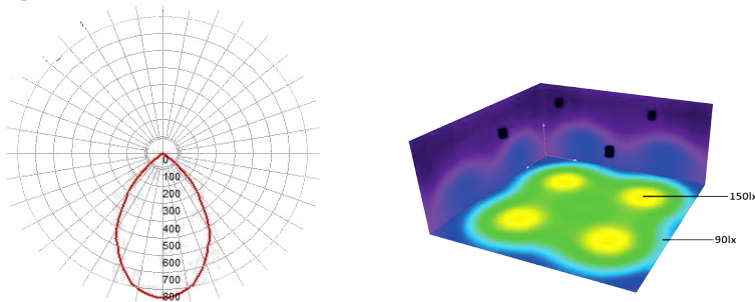

Technical Data - LED

Material	Aluminium / die- cast
Cutout	95mm / 95 x 195 / 95 x 295 mm
LED	10w 1000 lumen 3000 kelvin Available 2700 and 4000 Kelvin on request
CRI	80+ Also available CRI 90+
Protection	IP23
Approvals	

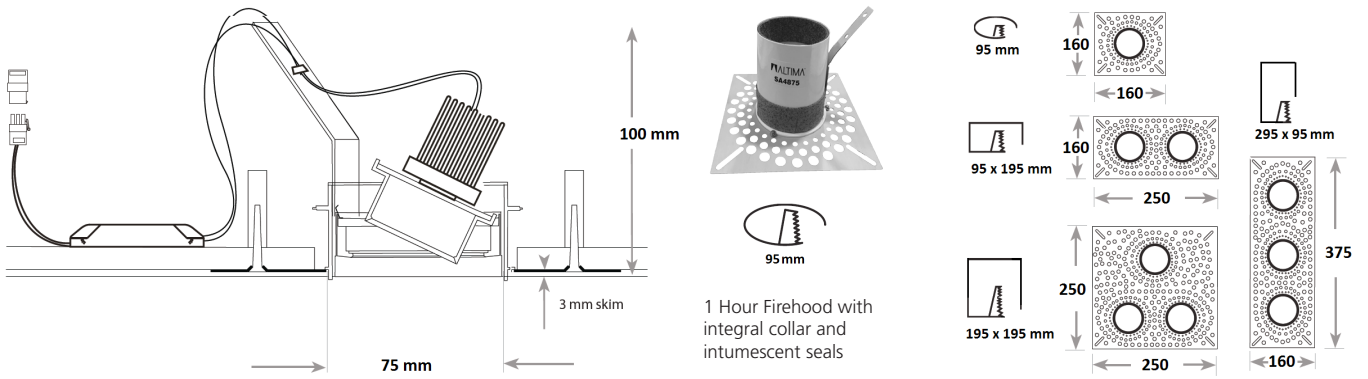


MR16 12V 20-50w	Order Lamps and Transformer separately	GU10 LED	Order GU10 Lamps separately
		With Firehood	With Firehood
Single	12.4051.57	12.4061.57	12.4051G.57
Double	12.4052.57	12.4062.57	12.4052G.57
Triple	12.4053.57	12.4063.57	12.4053G.57
Triangle	12.4073.57	12.4083.57	12.4073G.57

Emergency		
Type	With Firehood	
Emergency Standard	12.4051EM.57	12.4061EM.57
Emergency Auto Test	12.4051EM2.57	12.4061EM2.57

.18 Satin Silver
 .50 Black
 .57 White

MR16 - Light Intensity Diagrams

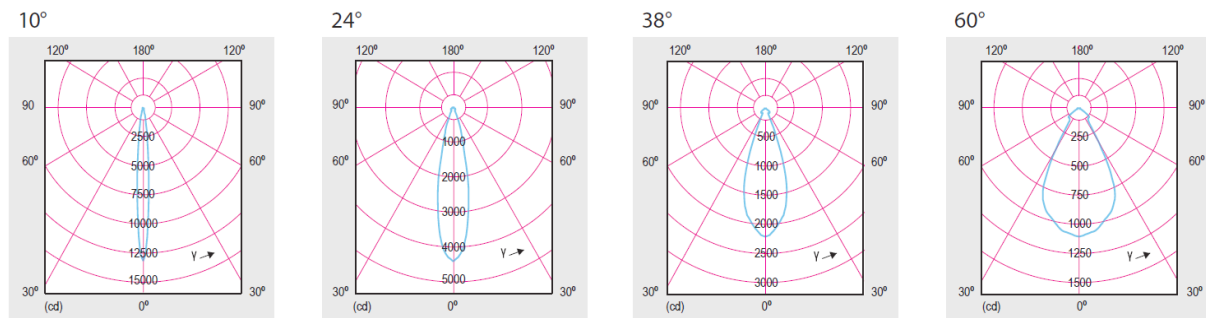

Technical Data	MR16	GU10 LED
Material	Aluminium	Aluminium
Cutout	95mm	95mm
Lamp Wattage	TBA	5, 6 and 7 watt
Lamp Holder	Gx5.3	GU10
Protection	IP23	IP23
Approvals		