

Lana 1 Directional LED Downlight



A directional downlight where the lamp is set deeply in a glare reducing baffle to give a controlled beam with minimum spilled light.

It is available as a standard version or 1 hour fire rated with firehood.

The fitting is prewired with an high output LED 10watt, 1000 lumen, 3000 kelvin standard. 2700 and 4000 kelvin available on request.




Dimming

1-10v
DALI
Trailing Edge

Technical Data - LED

Material	Aluminium
Cutout	80 mm
LED	10w 1000 lumen 3000 kelvin Available 2700 and 4000 Kelvin
CRI	80+ Also available CRI 90+
Protection	IP23
Approvals	L1 L2    

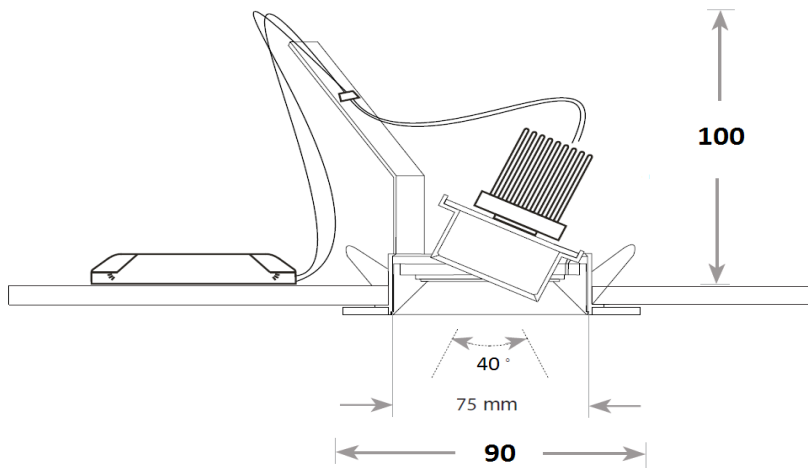

1 Hour Firehood with integral collar and intumescent seals

Lana 1 Directional LED Downlight

10w 1000 lumen

Colour	Switch	Dimmable 1-10v	Dimmable Dali	Dimmable Trailing Edge
Silver	12.4871L.18	12.4871LD.18	12.4871LDD.18	12.4871LDT.18
Black	12.4871L.50	12.4871LD.50	12.4871LDD.50	12.4871LDT.50
White	12.4871L.57	12.4871LD.57	12.4871LDD.57	12.4871LDT.57

With Firehood - 1 Hour Firehood with integral collar and intumescent seals


Colour	Switch	Dimmable 1-10v	Dimmable Dali	Dimmable Trailing Edge
Silver	12.4872L.18	12.4872LD.18	12.4872LDD.18	12.4872LDT.18
Black	12.4872L.50	12.4872LD.50	12.4872LDD.50	12.4872LDT.50
White	12.4872L.57	12.4872LD.57	12.4872LDD.57	12.4872LDT.57

Emergency

Type	With Firehood	
Emergency Standard	12.4871EM.57	12.4872EM.57
Emergency Auto Test	12.4871EM2.57	12.4872EM2.57

.18 Satin Silver
 .50 Black
 .57 White

Light Distribution for Lana 1 Directional

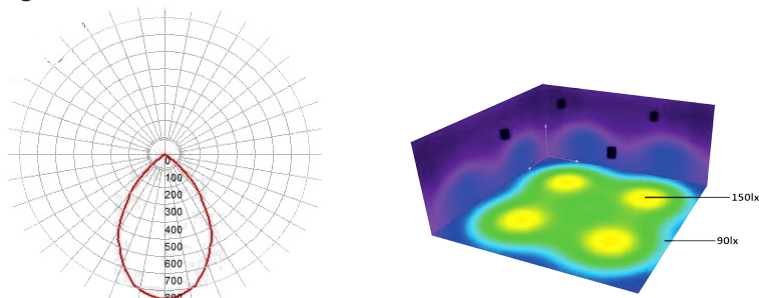


Technical Data - LED

Material	Aluminium
Cutout	80 mm
LED	10w 1000 lumen 3000 kelvin Available 2700 and 4000 Kelvin
CRI	80+ Also available CRI 90+
Protection	IP23
Approvals	

Lana 1 Directional Downlight

10w 1000 lumen

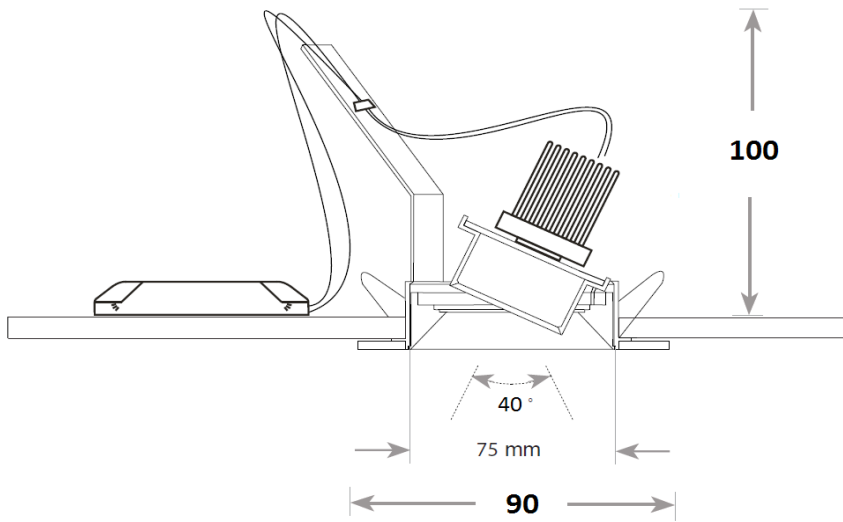

80 mm

1 Hour Firehood with integral collar and intumescent seals


MR16 12V 20-50w	Order Lamps and Transformer separately	GU10 LED	Order GU10 Lamps separately
		With Firehood	With Firehood
Silver	12.4871.57	12.4872.57	12.4871G.57
Black	12.4871.57	12.4872.57	12.4871G.57
White	12.4871.57	12.4872.57	12.4871G.57

Emergency

Type	With Firehood	
Emergency Standard	12.4871EM.57	12.4872EM.57
Emergency Auto Test	12.4871EM2.57	12.4872EM2.57

■ .18 Satin Silver ■ .50 Black □ .57 White

MR16 - Light Intensity Diagrams

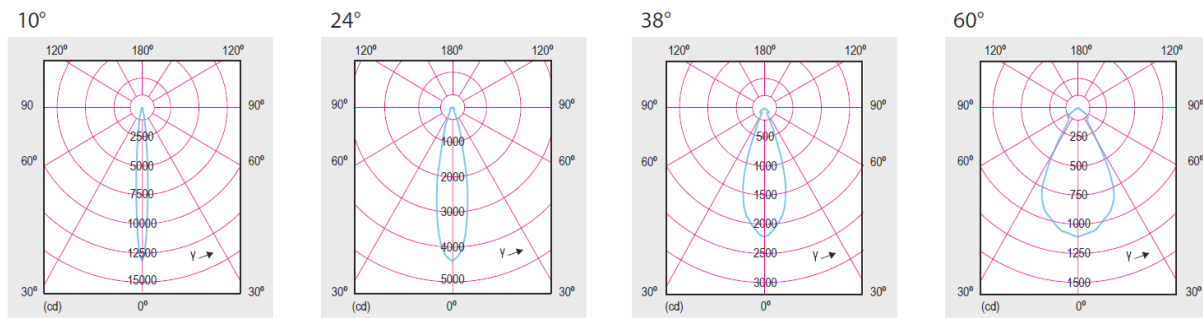

Technical Data	MR16	GU10 LED
Material	Aluminium	Aluminium
Cutout	80mm	80mm
Lamp Wattage	TBA	5, 6 and 7 watt
Lamp Holder	Gx5.3	GU10
Protection	IP23	IP23
Approvals		