





Single Lana Cone Square

1000 lumen 11w LED

A high performance downlight mounted in a square plate with the lamp set high in a deep glare reducing baffle to enable controlled directional lighting with maximum comfort.

The fitting is directionally adjustable through 360° horizontally and 40° vertically. The fitting can be supplied prewired to the transformer for ease of installation.

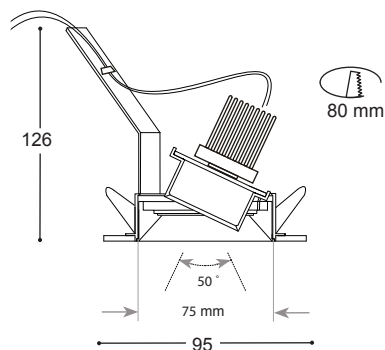

1 Hour Firehood with integral collar and intumescent seal



## LED

Switch	
<b>12.4891L.12</b>	Chrome
<b>12.4891L.18</b>	Satin Silver
<b>12.4891L.50</b>	Black
<b>12.4891L.57</b>	White
1 - 10 Dimmable	
<b>12.4891LD.12</b>	Chrome
<b>12.4891LD.18</b>	Satin Silver
<b>12.4891LD.50</b>	Black
<b>12.4891LD.57</b>	White
DALI Dimmable	
<b>12.4891LDD.12</b>	Chrome
<b>12.4891LDD.18</b>	Satin Silver
<b>12.4891LDD.50</b>	Black
<b>12.4891LDD.57</b>	White
Dimmable Trailing Edge	
<b>12.4891LDT.57</b>	White
<b>12.4891LDT.18</b>	Satin Silver
<b>12.4891LDT.50</b>	Black
<b>12.4891LDT.57</b>	White

## with Firehood






Switch	
<b>12.4892L.12</b>	Chrome
<b>12.4892L.18</b>	Satin Silver
<b>12.4892L.50</b>	Black
<b>12.4892L.57</b>	White
1 - 10 Dimmable	
<b>12.4892LD.12</b>	Chrome
<b>12.4892LD.18</b>	Satin Silver
<b>12.4892LD.50</b>	Black
<b>12.4892LD.57</b>	White
DALI Dimmable	
<b>12.4892LDD.12</b>	Chrome
<b>12.4892LDD.18</b>	Satin Silver
<b>12.4892LDD.50</b>	Black
<b>12.4892LDD.57</b>	White
Dimmable Trailing Edge	
<b>12.4892LDT.57</b>	White
<b>12.4892LDT.18</b>	Satin Silver
<b>12.4892LDT.50</b>	Black
<b>12.4892LDT.57</b>	White


## LED Technical Data

Material	Aluminium die-cast
Cutout	80mm/ with Firehood 85mm
LED	11w 1000 lumen 3000 Kelvin
CRI	80
Approvals	

Dimming	1-10v Dimmable with 81.1015
	Wafer Button Multiway
	Wafer Rotary 1-10v
	DALI
	Trailing Edge


## LED Technical Data

Material	Aluminium die-cast	Dimming	1-10v Dimmable with 81.1015
Cutout	80mm/ with Firehood 85mm		Wafer Button Multiway
LED	11w 1000 lumen 3000 Kelvin		Wafer Rotary 1-10v
CRI	80		DALI
Approvals	     		Trailing Edge

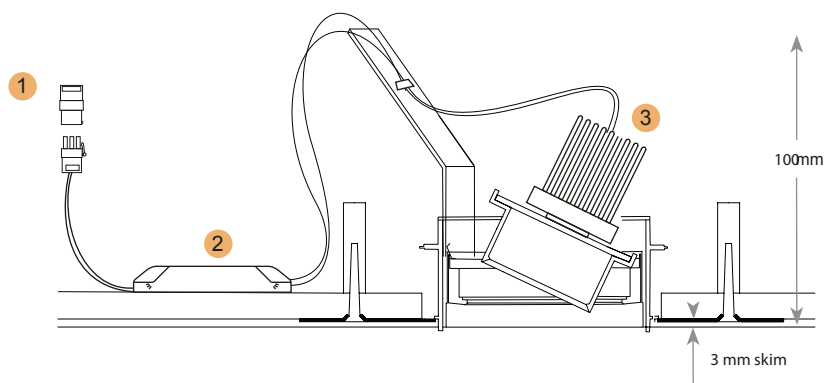

- 1 Primary plug and socket, enabling the socket to be prewired with first fix
- 2 Switched or Dimmable driver
- 3 Firehood option

## Light Distribution for Lana Cone

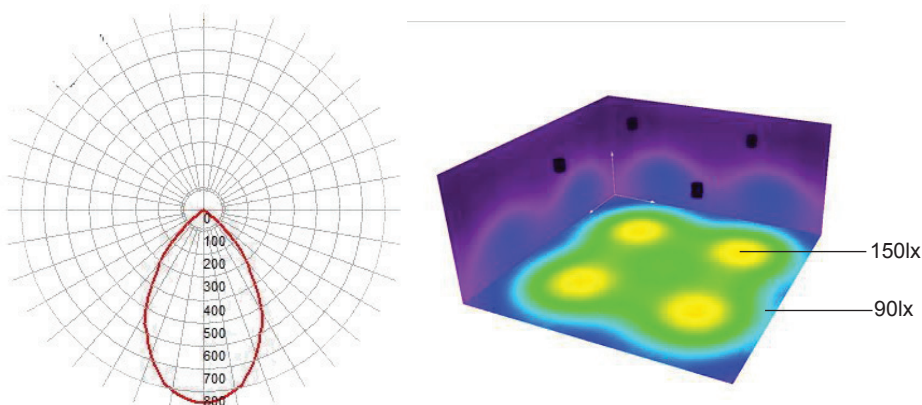

Lana Cone shown in a typical room (5x5m) with a ceiling height of 2.4m

### Dimming

For information on dimming controls, please see section 9 Wafer range for dimming options 1-10v, DALI and Trailing edge.

### Emergency

Emergency option supplied complete with relevant gear and battery pack.

Electronic emergency test switch available, please see page 7C1 for 81.EM02.57

For information on Flexible Emergency Lighting Remote Power Packs see page 7A4.